




# A NEW STEP TOWARDS A NEW WORLD



August 2024

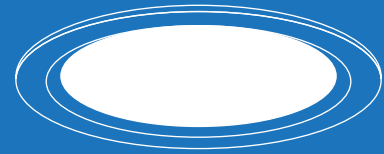

# PANEL LIGHT





## PDL HYBRID LUMORSLIM

5W, 10W, 12W  
15W, 20W



EFFICACY  
**>100  
lm/W**



CCT  
**3000K,  
4000K, 6500K**



CRI  
**>80**

**Applications:** Residential, Small Offices,  
Service Areas, Retail Shops

Square



Circular



Brighten up the place with aesthetic sleek design

### KEY FEATURES

#### PERFORMANCE

Lumen Efficacy >90lm/W (15W)  
Surge Protection: 2.5kV  
High Voltage Protection: 440V  
Wide Voltage Range: 180-270V  
Life up to >25,000 Burning Hrs.  
Better Lumen Maintenance  
Photo Biologically Safe Light

### CUSTOMER BENEFITS

More Light with less Power Consumption  
No impact on performance even with bad power conditions / surges  
Can withstand 440V for 30 mins.  
Wide application, covering all the T2, T3 cities  
Long life  
Better consistency in lux / lighting level through out life  
Eye comfort

#### SAFETY AND COMPLIANCES

Electrical Strength up to 3.71 KV with Earthing  
Shock proof even at high voltage, tested till 3.71kV  
Housing and Diffuser Material – PC with Fire Rated  
In case, fire gets extinguish within 30 sec  
Input Wire 0.75 sq.mm  
High temperature withstanding to avoid melting of wire during usage

#### OTHERS

BIS Approved  
All the safety parameters are approved  
Sleeker height 36 → 28 mm  
Hassle free service  
RoHS Compliant  
Environment and Health friendly

Panel Light

Decorative Light

Downlight

Outdoor

Batten

Bulb


**ANCHOR**

## RIMLESS SURFACE PANEL LIGHT

6W, 12W, 18W, 24W



EFFICACY  
**>100  
lm/W**




CCT  
**3000K, 4000K,  
6500K**



CRI  
**>80**

**Applications:**  
Bedrooms, Living Rooms, Shops, Halls

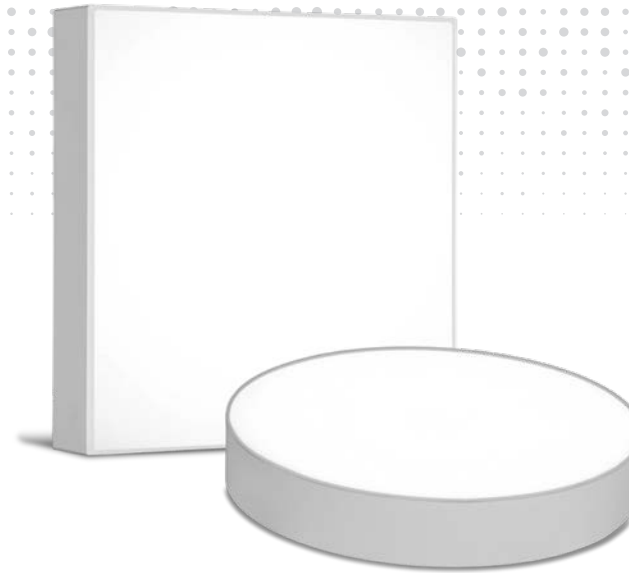

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Wide Voltage Range: 140-275V

CRI >80

Surge Protection: 4 kV

Lumen: 100lm/W

Life up to >25,000 Burning Hrs.

Better Lumen Maintenance

Photo Biologically Safe Light

Rimless Diffuser

Wide application, covering all the T2, T3 cites

Provides actual sunlight feeling

Better performance even with bad power conditions / surges

More light with less power consumption

Long life

Better consistency in lux / lighting levels through out life

Eye comfort

More light spread and output

#### SAFETY AND COMPLIANCES

Electrical strength up to 3.71kV

Housing & Diffuser Material – PC with V0 fire rated

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 3.71kV

In case, fire gets extinguish within 30 sec

High temperature withstanding to avoid melting of wire during usage

#### OTHERS

BIS approved & ROHS complaint

Available in 3 Wattage and 2 Shapes

Eco friendly

Wide range of product as per customer requirement



# SURFACE TRI CCT PANEL LIGHT

6W, 12W, 18W, 24W



**EFFICACY**  
**>100  
lm/W**





**CCT**  
**CW+WW+NW**



**CRI**  
**>80**

### Applications:

Bedrooms, Living Rooms, Shops, Halls

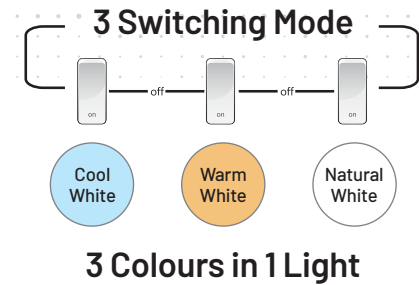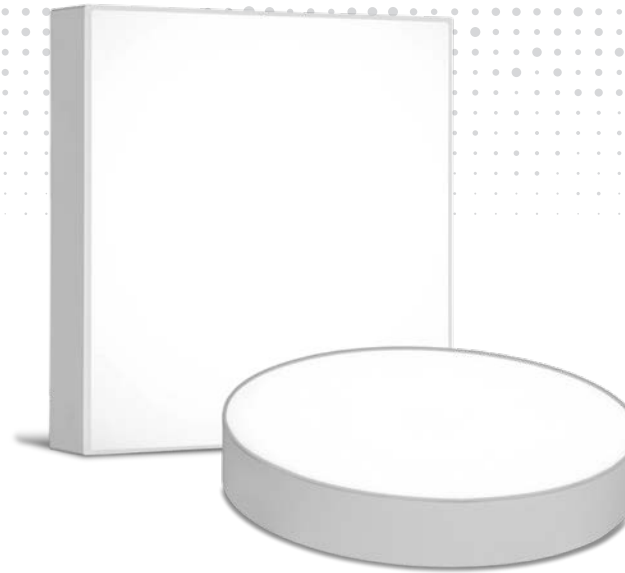

### KEY FEATURES

#### PERFORMANCE

Wide Voltage Range: 140-275V  
 CRI >80  
 Surge Protection: 4 kV  
 Lumen: 100lm/W  
 Life up to >25,000 Burning Hrs.  
 Better Lumen Maintenance  
 Photo Biologically Safe Light  
 Rimless Diffuser

### CUSTOMER BENEFITS

Wide application, covering all the T2, T3 cities  
 Provides actual sunlight feeling  
 Better performance even with bad power conditions / surges  
 More light with less power consumption  
 Long life  
 Better consistency in lux / lighting levels through out life  
 Eye comfort  
 More light spread and output

#### SAFETY AND COMPLIANCES

Electrical strength up to 3.71kV  
 Shock proof even at high voltage, tested till 3.71kV  
 Housing & Diffuser Material – PC with V0 fire rated  
 In case, fire gets extinguish within 30 sec  
 Input Wire 0.75 sq.mm  
 High temperature withstanding to avoid melting of wire during usage

#### OTHERS

BIS approved & ROHS complaint  
 Eco friendly  
 Available in 3 Wattage and 2 Shapes  
 Wide range of product as per customer requirement

Panel Light

Decorative Light

Downlight

Outdoor

Batten

Bulb


Decorative Light

Downlight

Outdoor

Batten

Bulb

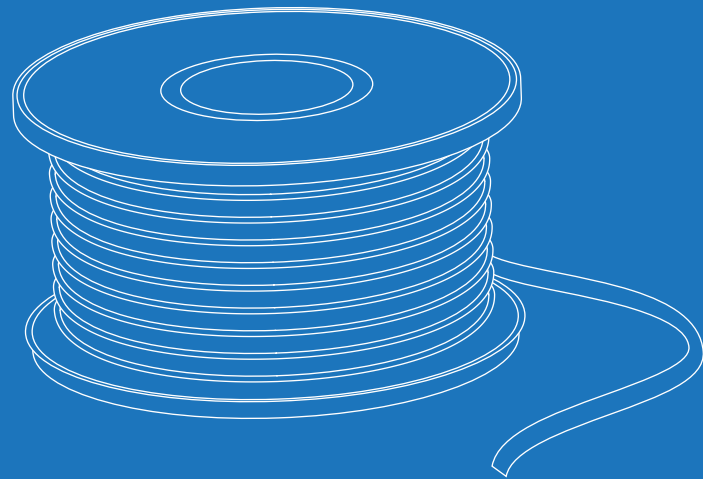

# DECORATIVE LIGHT





# ROPE LIGHT

120 LED/mtr, 20mtr



EFFICACY

>100  
lm/W



CCT

3000K, 4000K,  
6500K, Red, Green,  
Blue, Amber, Pink



CRI

>80

**Applications:** Residential, Small Offices,  
Service Areas, Retail Shops



Brighten up the place with aesthetic sleek design

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Input Voltage: 230V AC

Can be cut at Different Length after each 1 Meter

IP65 Rope Light

Rectifier & LED Life up to >30,000 Burning Hrs.

Surge Protection upto 2.5kV

Easy Installation in Small Spaces

Direct plug into AC supply with 2 pin plug

Customized lighting as per requirement

Can withstand from rain and dust

Long life

Better performance even with bad power conditions surges

Suitable for cove lighting

#### SAFETY AND COMPLIANCES

Electrical Strength up to 3.71kV

Housing Material – PVC with V2 Fire Rated

IS Approved Input Cable and Plug

Shock proof even at high voltage, tested till 3.71kV

In case, fire gets extinguish within 30 Sec

High temperature withstanding to avoid melting of wire during usage - long life

#### OTHERS

BIS Approved

Available in 6 Light Colours

Customized Length

All the safety parameters are approved

Used for decorative lights


Can be cut at each 1 meter for customized spaces

Downlight

Outdoor

Batten

Bulb

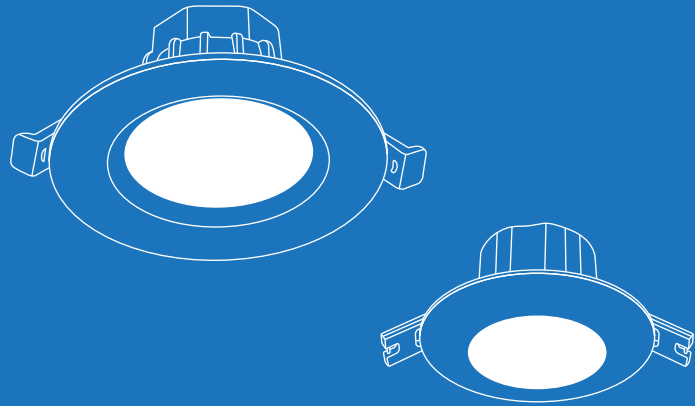

# DOWNLIGHTS



# ANCHOR

## CONCEALED DOWNLIGHT

5W, 7W, 9W

New Slim Design



Slim profile that lights up your space



EFFICACY

>80  
lm/W



CCT

6500K, 4000K, 3000K,  
Red, Green, Blue, Pink



CRI

>80

### Applications:

Cabinets, Bedroom, Halls, Shops

### KEY FEATURES

#### PERFORMANCE

Wide Voltage Range: 140-270V  
CRI>80  
Surge Protection: 2.5kV  
Life up to >25,000 Burning Hrs.  
Better Lumen Maintenance  
Photo Biologically Safe Light  
Available in 3 Light Colours

### CUSTOMER BENEFITS

Wide application, covering all the T2, T3 cites  
Provides actual sunlight feeling  
Better performance even with bad power conditions / surges  
Long life  
Better consistency in lux / lighting levels through out life  
Eye comfort  
Used for decorative lights

#### SAFETY AND COMPLIANCES

Class II Electrical Protection  
Shock proof even at high voltage, tested till 3.71kV  
Housing and Diffuser Material – Fire Retardant  
In case of fire, it gets self-extinguished within 30 sec  
Input Wire 0.75 sq.mm  
High temperature withstanding to avoid melting of wire during usage

#### OTHERS

BIS Approved  
All the safety parameters are approved  
Available in Multiple Wattage  
Variants based on customer usage: 5W, 7W, 9W  
Fit for Conceal Boxes  
Multipurpose – ceiling +junction box

Downlight


Outdoor

Batten

Bulb



# DEEP JUNCTION 3W

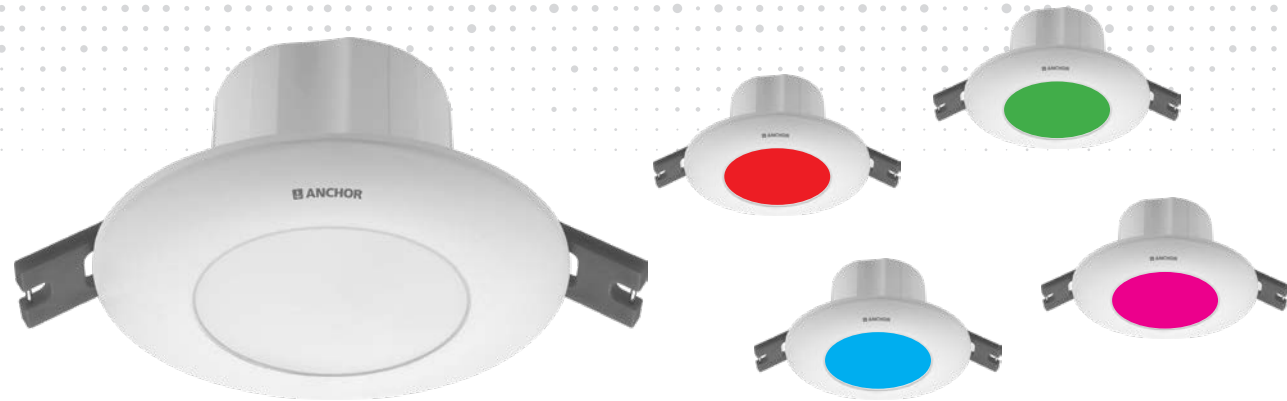

Sleek design suitable for low depth ceiling

Downlight

Outdoor



Batten



**EFFICACY**  
**>80  
lm/W**



**CCT**  
**6500K, 4000K,  
3000K, Red, Green,  
Blue, Pink**



**CRI**  
**>80**

**Applications:**  
Cabinets, Bedroom, Halls, Shops

Bulb

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Wide Voltage Range: 100-275V

CRI>80

Surge Protection: 2.5kV

Low Depth Deep Junction (80x32mm)

Life up to >25,000 Burning Hrs.

Better Lumen Maintenance

Photo Biologically Safe Light

Fit for Junction Box

Wide application, covering all the T2, T3 cites

Provides actual sunlight feeling

Better performance even with bad power conditions / surges

Compact design to install in small spaces

Long life

Better consistency in lux / lighting levels through out life

Eye comfort

Multipurpose – Ceiling + Junction Box

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Housing and Diffuser Material – Fire Retardant

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 3.71kV

In case of fire, it gets self-extinguished within 30 sec

High temperature withstanding to avoid melting of wire during usage

#### OTHERS

BIS Approved

Available in 4 Light Colours

Easy Installation

All the safety parameters are approved

Used for decorative lights

Easy to connect



# DEEP JUNCTION

8W, 15W



**EFFICACY**  
**>80**  
**lm/W**



**CCT**  
**6500K,**  
**3000K**



**CRI**  
**>80**

**Applications:**  
Bedrooms, Living Rooms, Indoors

### KEY FEATURES

### PERFORMANCE

Dual Mode Lighting-Inner and Outer Ring  
Wide Voltage Range: 140-275V  
Surge Protection:  $\geq 2kV$   
Life up to >25,000 Burning Hrs.  
Better Lumen Maintenance  
Photo Biologically Safe Light  
Fit for Junction Box

### SAFETY AND COMPLIANCES

Electrical strength up to 3.71kV  
Housing and Diffuser Material – PC with fire rated  
Input Wire 0.75 sq.mm

### OTHERS

BIS Approved

### CUSTOMER BENEFITS

Customer can change light color as per requirement  
Wide application, covering all the T2, T3 cites  
Better performance even with bad power conditions / surges  
Long life  
Better consistency in lux / lighting levels through out life  
Eye comfort  
Can be used as fitting in junction box

Shock proof even at high voltage, tested till 3.71kV  
In case, fire gets extinguish within 30 sec  
High temperature withstanding to avoid melting of wire during usage

All the safety parameters are approved & Eco friendly

Downlight

Outdoor

Batten

Bulb



# DEEP JUNCTION

## 3W Tri Color



Downlight

Outdoor



Batten



**EFFICACY**  
**>110**  
**lm/W**



**CCT**  
**CW, Red,**  
**Red+CW & Red,**  
**Blue, Red+Blue**



**CRI**  
**>80**

**Applications:**  
Cabinets, Bedroom, Halls, Shops  
& Decorative Lighting

Bulb

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Multi Color Deep Junction Downlight  
Wide Voltage Range: 160-275V  
Surge Protection:  $\geq 2kV$   
Life up to >25,000 Burning Hrs.  
Better Lumen Maintenance  
Photo Biologically Safe Light  
Fit for Junction Box

Multiple color in single product category  
Wide application range  
Better performance even with bad power conditions / surges  
Long life  
Better consistency in lux / lighting levels through out life  
Eye comfort  
Multipurpose – Ceiling + Junction Box

#### SAFETY AND COMPLIANCES

Electrical strength up to 3.71kV  
Housing and Diffuser Material – PC with fire rated  
Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 3.71kV  
In case, fire gets extinguish within 30 sec  
High temperature withstanding to avoid melting of wire during usage

#### OTHERS

BIS Approved  
Easy Installation

All the safety parameters are approved & Eco friendly  
Easy to connect

# ANCHOR

## SPOT LIGHT 2W



Adds a spark of style and focus to any space



**EFFICACY**  
**>60**  
**lm/W**



**CCT**  
**6500K, 3000K,**  
**Red, Green, Blue**



**CRI**  
**>80**

**Applications:**  
Cabinets, Bedroom, Halls, Shops

### KEY FEATURES

#### PERFORMANCE

Wide Voltage Range: 100-300V  
CRI>80  
Surge Protection: 2.5kV  
Life up to >15,000 Burning Hrs.  
Better Lumen Maintenance  
Photo Biologically Safe Light  
Compact Design (16mm Height)

#### SAFETY AND COMPLIANCES

Class II Electrical Protection  
Housing and Diffuser Material – Fire Retardant  
Input Wire 0.75 sq.mm

#### OTHERS

BIS Approved  
Available in 3 Light Colours  
Separate Driver Compartment

### CUSTOMER BENEFITS

Wide application, covering all the T2, T3 cities  
Provides actual sunlight feeling  
Better performance even with bad power conditions / surges  
Long life product  
Better consistency in lux / lighting levels through out Life  
Eye comfort  
Compact design to install in small spaces

Shock proof even at high voltage, tested till 3.71kV  
In case of fire, it gets self-extinguished within 30 sec  
High temperature withstanding to avoid melting of wire during usage


All the safety parameters are approved  
Used for decorative lights  
Hassle free servicing

Downlight

Outdoor

Batten

Bulb

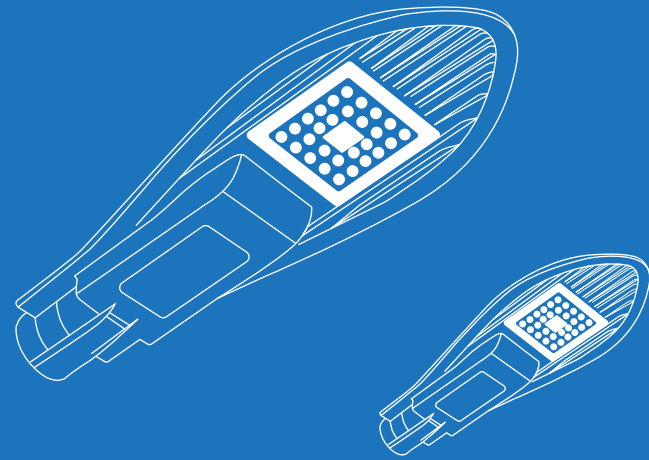

# OUTDOOR



Outdoor

Batten

Bulb

# ANCHOR

## STREET LIGHT DOLPHIN SHAPE 15W, 25W, 45W



EFFICACY  
**>100  
lm/W**



CCT  
**3000K,  
6500K**



CRI  
**>80**

**Applications:** Street light, Pathway, Garden, Playground, Buildings & Compound lighting



Higher life and higher performance  
for extremely safe & reliable surroundings



### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Lumen Efficacy: > 100 Lm/W  
Wide Voltage Range: 140-270V  
Surge Protection: 4kV for 15W, 25W & 45W  
IP66 Protections  
Life up to >25,000 Burning Hrs.  
Better Lumen Maintenance  
Photo Biologically Safe Light  
Aerodynamic Al housing Design for Better Thermal Management

More light with less power consumption  
Wide application, covering all the T2, T3 cites  
Better performance even with bad power conditions / surges  
Can withstand rain and dust protection  
Long life  
Better consistency in lux / lighting levels through out life  
Eye comfort  
Better consistency. Lux levels and reliability at extreme temp condition

#### SAFETY AND COMPLIANCES

Electrical Strength  
Lens Material – Fire Retardant  
Isolated Driver

Shock proof even at high voltage, tested till 1.5kV  
In case of fire, it gets self-extinguished within 30 sec  
No impact of power fluctuation

#### OTHERS

BIS Approved  
Contemporary Dolphin Shape  
Separate Driver Compartment

All the safety parameters are approved  
Better aesthetics  
Hassle free servicing

Outdoor

Batten

Bulb



# FLOOD LIGHT

30W, 50W, 100W



Sturdy and robust design for quality performance



**EFFICACY**  
**>100**  
**lm/W**



**CCT**  
**6500K**



**CRI**  
**>80**

**Applications:** Outdoor, Shops, Party Hall

### KEY FEATURES

#### PERFORMANCE

- Lumen Efficacy: >100 Lm/W
- Wide Voltage Range: 140-270V
- Surge Protection: 4kV
- IP65 & IK07 Protection
- Life up to >30,000 Burning Hrs.
- Better Lumen Maintenance
- Better Thermal Management
- High Voltage Application up to 440V

### CUSTOMER BENEFITS

- More light with less power consumption
- Wide application, covering all the T2, T3 cites
- No impact on performance even with bad power conditions / surges
- Robust design suitable for outdoor application (Rain and dust protection)
- Long life
- Better consistency in lux / lighting levels through out life
- Long life
- Can withstand 440V for 30 mins.

#### SAFETY AND COMPLIANCES

- Class I Electrical Protection
- Shock proof even at high voltage, tested till 1.5kV
- Driver Housing Material – Fire Retardant
- In case of fire, it gets self-extinguished within 30 sec
- Input Wire 0.75 sq.mm
- High temperature withstanding to avoid melting of wire during usage

#### OTHERS

- BIS Approved
- All the safety parameters are approved
- Elegant Aluminium Die Cast Housing
- Better aesthetic and performance
- Easy Installation
- Easy to fit on wall

Outdoor

Batten

Bulb



# BATTEN



Batten

Bulb




# ANMOL PC BATTEN

10W, 20W, 24W



More brightness. More savings.

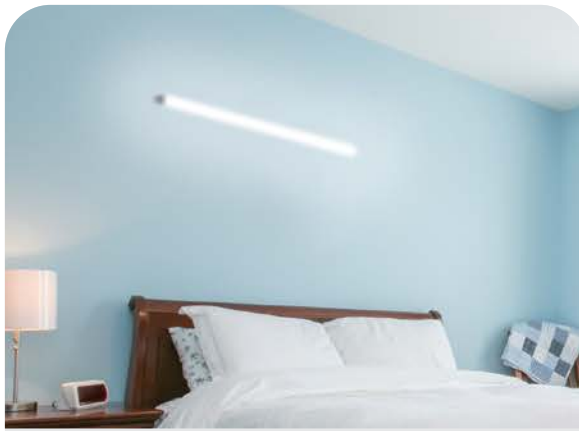

**EFFICACY**  
**>100  
lm/W**



**CCT**  
**3000K,  
6500K**



**CRI**  
**>80**

**Applications:** House, Shops

### KEY FEATURES

#### PERFORMANCE

Lumen Efficacy: >100Lm/W

CRI>80

Surge Protection: 4kV

Wide Voltage Range: 140-275V

Life up to >25,000 Burning Hrs.

Better Lumen Maintenance

Photo Biologically Safe Light

High Voltage Application upto 440V

### CUSTOMER BENEFITS

More light with less power consumption

Provides actual sunlight feeling

No impact on performance even with bad power conditions / surges

Wide application, covering all the T2, T3 cites

Long life product

Better consistency in lux / lighting levels through out Life

Eye comfort

Can withstand 440V for 30 mins.

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Housing & Diffuser Material - Fire Retardant

Input Wire 0.75 Sq.mm

Shock proof even at high voltage, tested till 3.71kV

In case of fire, it gets self-extinguished within 30 sec

High current withstanding to avoid melting of wire during usage

#### OTHERS

BIS Approved

20W Batten Available In 3 CCTs

All the safety parameters are approved

Decorative purpose lighting

Batten

Bulb



# BATTEN

36W



EFFICACY  
**>100  
lm/W**




CCT  
**3000K,  
6500K**



CRI  
**>80**

**Applications:** House, Shops



## High-performance batten for superior brightness



### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Lumen Efficacy: >100Lm/W

Surge Protection: 4kV

Wide Voltage Range: 140-275V

Life up to >25,000 Burning Hrs.

Better Lumen Maintenance

Photo Biologically Safe Light

36W Batten in Durable Plastic Housing

High Voltage Application upto 440V

More light with less power consumption

No impact on performance even with bad power conditions / surges

Wide application, covering all the T2, T3 cites

Long life product

Better consistency in lux / lighting levels through out Life

Eye comfort

Affordable batten with enhanced performance

Can withstand 440V for 30 mins.

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Housing & Diffuser Material - Fire Retardant

Input Wire 0.75 Sq.mm

Shock proof even at high voltage, tested till 3.71kV

In case of fire, it gets self-extinguished within 30 sec

High current withstanding to avoid melting of wire during usage



#### OTHERS

BIS Approved

All the safety parameters are approved

Batten

Bulb

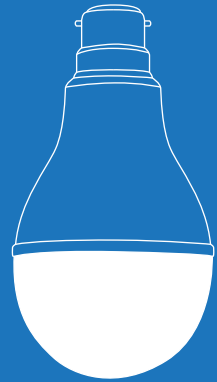

# BULBS





## RIKI SAVER LED BULB

3W, 5W, 12W  
B22



EFFICACY

**>90  
lm/W**



CCT

**3000K,  
6500K**



CRI

**>80**

**Applications:** Living Rooms, Stores, Shops, etc.

Always shines brightly  
intercepting any input power condition



### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Lumen Efficacy >105Lm/W (12W)	More light with less power consumption
Surge Protection: 4kV	No impact on performance even with bad power conditions / surges
High Voltage Protection: 440V	Can withstand 440V for 120 Mins.
Life up to >25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in Lux / lighting levels through out life
Photo Biologically Safe Light	Eye comfort
Full Beam Diffuser	Wide light distribution

#### SAFETY AND COMPLIANCES

Electrical Strength up to 3.71V with Earthing	Shock proof even at high voltage, tested till 3.71 kV
Housing and Diffuser Material – PC & PA with Fire Retardant Grade	In case, fire gets extinguish within 30 sec
B22 Cap	Easy fitment in regular bulb holder

#### RELIABILITY

BIS & BEE approved Product	All the safety parameters are approved
3W Bulb size is 55mmx101mm	Better light with optimized design
5W Bulb size is 55mmx101mm	
12W Bulb size is 60mmx113mm	



# RIKI SAVER LED BULB

7W & 9W  
B22



EFFICACY

**>90  
lm/W**



CCT

**3000K,  
6500K**



CRI

**>80**

**Applications:** Living Rooms, Stores, Shops, etc.



## KEY FEATURES

## CUSTOMER BENEFITS

### PERFORMANCE

Lumen Efficacy >90lm/W

Surge Protection: 4kV

High Voltage Protection: 440V

Life up to >25,000 Burning Hrs.

Better Lumen Maintenance

Photo Biologically Safe Light

Full Beam Diffuser

More light with less power consumption

No impact on performance even with bad power conditions / surges

Can withstand 440V for 120 Mins.

Long life

Better consistency in Lux / lighting levels through out life

Eye comfort

Wide light distribution

### SAFETY AND COMPLIANCES

Electrical Strength up to 3.71V with Earthing

Housing and Diffuser Material – PC & PA with Fire Retardant Grade

B22 Cap

Shock proof even at high voltage, tested till 3.71 kV

In case, fire gets extinguish within 30 sec

Easy fitment in regular bulb holder

### RELIABILITY

BIS & BEE approved Product

7W Bulb size is 55mmx101mm

9W Bulb size is 60mmx106mm

All the safety parameters are approved

Better light with optimized design



# RIKI MAX LED BULB

15W, 18W, 23W



EFFICACY

**>105  
lm/W**



CCT

**3000K,  
6500K**



CRI

**>80**

**Applications:** Living Rooms, Stores, Shops, etc.



## KEY FEATURES

## CUSTOMER BENEFITS

### PERFORMANCE

Lumen Efficacy >105Lm/W

Surge protection 4kV

High Voltage protection 440V

Life up to >25,000 Burning Hrs.

Better Lumen maintenance

Photo biologically Safe light

Full beam diffuser

More light with less power consumption

No impact on performance even with bad power conditions / surges

Can withstand 440V for 120 Mins.

Long life

Better consistency in Lux / lighting levels through out life

Eye comfort

Wide light distribution

### SAFETY AND COMPLIANCES

Electrical strength up to 3.71V with Earthing

Housing and Diffuser material – PC & PA with fire retardant grade.

B22 Cap

Shock proof even at high voltage, tested till 3.71 kV

In case, fire gets extinguish within 30 sec

Easy fitment in regular bulb holder

### RELIABILITY

BIS & BEE approved Product

15W Bulb size is 65mmx125mm

18W Bulb size is 70mmx137mm

23W Bulb size is 95mmx175mm

All the safety parameters are approved

Better Light with Optimized Design



# RIKI HYPER LED BULB

30W, 40W, 50W, 70W  
B22



EFFICACY

**>100  
lm/W**



CCT

**3000K,  
6500K**



CRI

**>80**

**Applications:** Warehouse, Stores, Garage, etc.

Bulb



Pocket hercules, small size,  
bright light

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Lumen Efficacy >105Lm/W	More light with less power consumption
Surge protection 4kV	No impact on performance even with bad power conditions / surges
High Voltage protection 440V	Can withstand 440V for 120 Mins.
Life up to >25,000 Burning Hrs.	Long life
Better Lumen maintenance	Better consistency in Lux / lighting levels through out life
Photo biologically Safe light	Eye comfort
Full beam diffuser	Wide light distribution

#### SAFETY AND COMPLIANCES

Electrical strength up to 3.71V with Earthing	Shock proof even at high voltage, tested till 3.71 kV
Housing and Diffuser material – PC & PA with fire retardant grade.	In case, fire gets extinguish within 30 sec
B22 Cap	Easy fitment in regular bulb holder

#### RELIABILITY

BIS & BEE approved Product (30W)	All the safety parameters are approved
30W Bulb size is 100mmx150mm	Better Light with Optimized Design
40W Bulb size is 120mmx165mm	
50W Bulb size is 140mmx190mm	



# EMERGENCY BULB

9W



EFFICACY  
**>100  
lm/W**



CCT  
**6500K**



CRI  
**>80**

### Applications:

Study Table, Living Rooms, Shops, etc.



2 Level Protection for Long Battery Life



3 Hours Battery Backup



Protects Battery from Over Heating



## Bright light even during power cuts

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Lumen Efficacy >100Lm/W	More light with less power consumption
Surge protection 3.5kV	No impact on performance even with bad power conditions / surges
High Voltage protection 420V	Can withstand 440V for 120 Mins.
Wide Voltage Range 100-300V	Wide application , covering all the T1 cities
Life up to >25,000 Burning Hrs.	Long life
Better Lumen maintenance	Better consistency in Lux / lighting levels through out life
Battery operated	Incase of power failure lamp operates on battery
Photo biologically Safe light	Eye comfort

#### SAFETY AND COMPLIANCES

Electrical strength up to 3.71V with Earthing	Shock proof even at high voltage, tested till 3.71 kV
Housing and Diffuser material – PC & PA with fire retardant grade.	In case, fire gets extinguish within 30 sec
B22 Cap	Easy fitment in regular bulb holder

#### RELIABILITY

PTC & BMS	PTC Protects battery from over heating & BMS gives longer battery life
Bulb size is 65mmx121mm	Better light with optimized design

Wattage	CCT	Lumen Output	Cut Out Dimension (mm)	Product Dimension (mm)	Product Code	MRP (₹)	PKG STD
<b>LED SLIM PANEL LIGHT ROUND</b>							
5W	3000	260lm	Ø108	Ø120x25	APAM01053	700	10
	4000	275lm	Ø108	Ø120x25	APAM01054	700	10
	6500	275lm	Ø108	Ø120x25	APAM01057	700	10
10W	3000	670lm	Ø132	Ø145x20	APAM01103	900	10
	4000	700lm	Ø132	Ø145x20	APAM01104	900	10
	6500	700lm	Ø132	Ø145x20	APAM01107	900	10
15W	3000	1000lm	Ø156	Ø170x25	APAM01153	1000	10
	4000	1050lm	Ø156	Ø170x25	APAM01154	1000	10
	6500	1400lm	Ø156	Ø170x25	APAM01157	1000	10
20W	3000	1340lm	Ø177	Ø190x25	APAM01203	1200	10
	4000	1400lm	Ø177	Ø190x25	APAM01204	1200	10
	6500	1400lm	Ø177	Ø190x25	APAM01207	1200	10
<b>LED SLIM PANEL LIGHT SQUARE</b>							
5W	3000	260lm	108x108	120x120x25	APAM02053	700	10
	4000	275lm	108x108	120x120x25	APAM02054	700	10
	6500	275lm	108x108	120x120x25	APAM02057	700	10
10W	3000	670lm	132x132	145x145x20	APAM02103	900	10
	4000	700lm	132x132	145x145x20	APAM02104	900	10
	6500	700lm	132x132	145x145x20	APAM02107	900	10
15W	3000	1000lm	156x156	170x170x25	APAM02153	1000	10
	4000	1050lm	156x156	170x170x25	APAM02154	1000	10
	6500	1400lm	156x156	170x170x25	APAM02157	1000	10
20W	3000	1340lm	177x177	190x190x25	APAM02203	1200	10
	4000	1400lm	177x177	190x190x25	APAM02204	1200	10
	6500	1400lm	177x177	190x190x25	APAM02207	1200	10
<b>PC PANEL LIGHT WITH INTEGRATED DRIVER - ROUND</b>							
3W	3000K	180	Ø68	Ø86x30	APAM03033	400	20
	4000K	186	Ø68	Ø86x30	APAM03034	400	20
	6500K	240	Ø68	Ø86x30	APAM03037	400	20
6W	3000K	370	Ø97	Ø120x30	APAM03063	500	20
	4000K	390	Ø97	Ø120x30	APAM03064	500	20
	6500K	510	Ø97	Ø120x30	APAM03067	500	20
10W	3000K	700	Ø129	Ø144x30	APAM03103	600	20
	4000K	720	Ø129	Ø144x30	APAM03104	600	20
	6500K	850	Ø129	Ø144x30	APAM03107	600	20
15W	3000K	1050	Ø145	Ø170x30	APAM03153	800	20
	4000K	1080	Ø145	Ø170x30	APAM03154	800	20
	6500K	1350	Ø145	Ø170x30	APAM03157	800	20
20W	3000K	1400	Ø195	Ø220x30	APAM03203	1000	20
	4000K	1440	Ø195	Ø220x30	APAM03204	1000	20
	6500K	1800	Ø195	Ø220x30	APAM03207	1000	20
<b>PC PANEL LIGHT WITH INTEGRATED DRIVER - SQUARE</b>							
3W	3000K	180	Ø68	Ø86x30	APAM04033	400	20
	4000K	186	Ø68	Ø86x30	APAM04034	400	20
	6500K	240	Ø68	Ø86x30	APAM04037	400	20

Wattage	CCT	Lumen Output	Cut Out Dimension (mm)	Product Dimension (mm)	Product Code	MRP (₹)	PKG STD
<b>PC PANEL LIGHT WITH INTEGRATED DRIVER - SQUARE</b>							
6W	3000K	370	Ø97	Ø120x30	APAM04063	500	20
	4000K	390	Ø97	Ø120x30	APAM04064	500	20
	6500K	510	Ø97	Ø120x30	APAM04067	500	20
10W	3000K	700	Ø129	Ø144x30	APAM04103	600	20
	4000K	720	Ø129	Ø144x30	APAM04104	600	20
	6500K	850	Ø129	Ø144x30	APAM04107	600	20
15W	3000K	1050	Ø145	Ø170x30	APAM04153	800	20
	4000K	1080	Ø145	Ø170x30	APAM04154	800	20
	6500K	1350	Ø145	Ø170x30	APAM04157	800	20
20W	3000K	1400	Ø195	Ø220x30	APAM04203	1000	20
	4000K	1440	Ø195	Ø220x30	APAM04204	1000	20
	6500K	1800	Ø195	Ø220x30	APAM04207	1000	20
<b>RIMLESS SURFACE PANEL LIGHT - ROUND</b>							
6W	3000K	540	NA	Ø110x31	APAM16063R1	550	20
	4000K	570	NA	Ø110x31	APAM16064R1	550	20
	6500K	600	NA	Ø110x31	APAM16067R1	550	20
12W	3000K	1080	NA	Ø125x31	APAM16123R1	850	20
	4000K	1140	NA	Ø125x31	APAM16124R1	850	20
	6500K	1200	NA	Ø125x31	APAM16127R1	850	20
18W	3000K	1620	NA	Ø150x31	APAM16183R1	1150	20
	4000K	1710	NA	Ø150x31	APAM16184R1	1150	20
	6500K	1800	NA	Ø150x31	APAM16187R1	1150	20
24W	3000K	2160	NA	Ø200x31	APAM16243R1	1550	20
	4000K	2280	NA	Ø200x31	APAM16244R1	1550	20
	6500K	2400	NA	Ø200x31	APAM16247R1	1550	20
<b>RIMLESS SURFACE PANEL LIGHT - SQUARE</b>							
6W	3000K	540	NA	110x110x31	APAM17063R1	550	20
	4000K	570	NA	110x110x31	APAM17064R1	550	20
	6500K	600	NA	110x110x31	APAM17067R1	550	20
12W	3000K	1080	NA	125x125x31	APAM17123R1	850	20
	4000K	1140	NA	125x125x31	APAM17124R1	850	20
	6500K	1200	NA	125x125x31	APAM17127R1	850	20
18W	3000K	1620	NA	150x150x31	APAM17183R1	1150	20
	4000K	1710	NA	150x150x31	APAM17184R1	1150	20
	6500K	1800	NA	150x150x31	APAM17187R1	1150	20
24W	3000K	2160	NA	200x200x31	APAM17243R1	1550	20
	4000K	2280	NA	200x200x31	APAM17244R1	1550	20
	6500K	2400	NA	200x200x31	APAM17247R1	1550	20
<b>SURFACE TRI CCT PANEL LIGHT - ROUND</b>							
6W	CW+WW+NW	NA	NA	110x110x31	APAM1606CNW	750	20
12W	CW+WW+NW	NA	NA	125x125x31	APAM1612CNW	1050	20
18W	CW+WW+NW	NA	NA	150x150x31	APAM1618CNW	1350	20
24W	CW+WW+NW	NA	NA	200x200x31	APAM1624CNW	1750	20
<b>SURFACE TRI CCT PANEL LIGHT - SQUARE</b>							
6W	CW+WW+NW	NA	NA	Ø110x31	APAM1606CNW	750	20
12W	CW+WW+NW	NA	NA	Ø125x31	APAM1612CNW	1050	20
18W	CW+WW+NW	NA	NA	Ø150x31	APAM1618CNW	1350	20
24W	CW+WW+NW	NA	NA	Ø200x31	APAM1624CNW	1750	20

Wattage	CCT	Lumen Output	Cut Out Dimension (mm)	Product Dimension (mm)	Product Code	MRP (₹)	PKG STD
<b>CONCEALED DOWNLIGHT</b>							
5W	3000K	360lm	Ø75	Ø110x50	ADLM03053	300	20
	4000K	380lm	Ø75	Ø110x50	ADLM03054	300	20
	6500K	400lm	Ø75	Ø110x50	ADLM03057	300	20
	Red	NA	Ø75	Ø110x50	ADLM0305R	300	20
	Green	NA	Ø75	Ø110x50	ADLM0305G	300	20
	Blue	NA	Ø75	Ø110x50	ADLM0305B	300	20
7W	3000K	505lm	Ø85	Ø105x60	ADLM03073	350	20
	4000K	532lm	Ø85	Ø105x60	ADLM03073	350	20
	6500K	560lm	Ø85	Ø105x60	ADLM03077	350	20
	Red	NA	Ø85	Ø105x60	ADLM0307R	350	20
	Green	NA	Ø85	Ø105x60	ADLM0307G	350	20
	Blue	NA	Ø85	Ø105x60	ADLM0307B	350	20
9W	3000K	648lm	Ø85	Ø105x60	ADLM03093	350	20
	4000K	684lm	Ø85	Ø105x60	ADLM03093	350	20
	6500K	720lm	Ø85	Ø105x60	ADLM03097	350	20
	Red	NA	Ø85	Ø105x60	ADLM0309R	350	20
	Green	NA	Ø85	Ø105x60	ADLM0309G	350	20
	Blue	NA	Ø85	Ø105x60	ADLM0309B	350	20
<b>DEEP JUNCTION DOWNLIGHT</b>							
8W	3000K	720	Ø5	Ø8.4x6.7	ADLM04083	350	20
	6500K	800	Ø5	Ø8.4x6.7	ADLM04087	350	20
	Red	NA	Ø5	Ø8.4x6.7	ADLM0408R	350	20
	Green	NA	Ø5	Ø8.4x6.7	ADLM0408G	350	20
	Blue	NA	Ø5	Ø8.4x6.7	ADLM0408B	350	20
	Pink	NA	Ø5	Ø8.4x6.7	ADLM0408P	350	20
15W	3000K	1350	Ø5	Ø8.4x6.7	ADLM04153	560	20
	6500K	1500	Ø5	Ø8.4x6.7	ADLM04157	560	20
	Red	NA	Ø5	Ø8.4x6.7	ADLM0415R	560	20
	Green	NA	Ø5	Ø8.4x6.7	ADLM0415G	560	20
	Blue	NA	Ø5	Ø8.4x6.7	ADLM0415B	560	20
	Pink	NA	Ø5	Ø8.4x6.7	ADLM0415P	560	20
<b>DEEP JUNCTION DOWNLIGHT - TRI COLOUR</b>							
3W	CW + Red + Pink	NA	Ø5	Ø8x3.3	ADLM0403CRP	200	50
	Red + Blue + Violet	NA	Ø5	Ø8x3.3	ADLM0403RBV	200	50
<b>LED SPOT LIGHT</b>							
2W	3000K	108lm	Ø33	Ø41.6x16.5	ASPM01023	180	50
	6500K	120lm	Ø33	Ø41.6x16.5	ASPM01027	180	50
	Red	NA	Ø33	Ø41.6x16.5	ASPM0102R	180	50
	Green	NA	Ø33	Ø41.6x16.5	ASPM0102G	180	50
	Blue	NA	Ø33	Ø41.6x16.5	ASPM0102B	180	50
	<b>LED BATTEN SQUARE</b>						
10W	3000K	900lm	NA	590x22x34	ABTM01103	375	10
	6500K	1000lm	NA	590x22x34	ABTM01107	375	10
20W	3000K	1800lm	NA	1190x22x34	ABTM01203	560	10
	6500K	2000lm	NA	1190x22x34	ABTM01207	560	10
24W	3000K	2160lm	NA	1130x25x35	ABTM03243	630	10
	6500K	2640lm	NA	1130x25x35	ABTM04247	630	10
<b>RIKI SAVER LED BULB</b>							
3W	3000K	315K	NA	55x101	ABUM06033	110	50
	6500K	315K	NA	55x101	ABUM06037	110	50
5W	3000K	525lm	NA	55x101	ABUM06053	110	50
	6500K	525lm	NA	55x101	ABUM06057	110	50
7W	3000K	630lm	NA	55x101	ABUM06073	120	50
	6500K	630lm	NA	55x101	ABUM06077	120	50

Wattage	CCT	Lumen Output	Cut Out Dimension (mm)	Product Dimension (mm)	Product Code	MRP (₹)	PKG STD
<b>RIKI SAVER LED BULB</b>							
9W	3000K	810lm	NA	60x106	ABUM06093	140	50
	6500K	810lm	NA	60x106	ABUM06097	140	50
12W	3000K	1080lm	NA	60x113	ABUM06123	200	50
	6500K	1260lm	NA	60x113	ABUM06127	200	50
<b>RIKI MAX LED BULB</b>							
15W	3000K	1350lm	NA	65x125	ABUM06153	240	30
	6500K	1575lm	NA	65x125	ABUM06157	240	30
18W	3000K	1620lm	NA	70x137	ABUM06183	360	30
	6500K	1890lm	NA	70x137	ABUM06187	360	30
23W	3000K	2070lm	NA	95x175	ABUM06233	520	30
	6500K	2415lm	NA	95x175	ABUM06237	520	30
<b>RIKI HYPER LED BULB</b>							
30W	3000K	2700lm	NA	100x150	ABUM06303	700	10
	6500K	3000lm	NA	100x150	ABUM06307	700	10
40W	3000K	3600lm	NA	120x165	ABUM06403	900	10
	6500K	4000lm	NA	120x165	ABUM06407	900	10
50W	3000K	4500lm	NA	140x190	ABUM06503	1100	10
	6500K	5000lm	NA	140x190	ABUM06507	1100	10
70W	6500K	7000lm	NA	160X265	ABUM06707	1700	4
<b>LED EMERGENCY BULB</b>							
9W	6500K	900lm	NA	65x121	ABUM03097R1	650	10
<b>NIGHT BULB</b>							
0.5W	Blue	NA	NA	45x70	ABUM0201B	55	60
	Green	NA	NA	45x70	ABUM0201G	55	60
	Red	NA	NA	45x70	ABUM0201R	55	60
	White	NA	NA	45x70	ABUM0201W	55	60
	Yellow	NA	NA	45x70	ABUM0201Y	55	60
	Orange	NA	NA	45x70	ABUM0201O	55	60
Pink	NA	NA	45x70	ABUM0201P	55	60	
<b>LED STREET LIGHT</b>							
15W	3000K	1350	NA	284x115x55	ASTM01153	1500	10
	6500K	1350	NA	284x115x55	ASTM01157	1500	10
25W	3000K	2250	NA	284x115x55	ASTM01253	1700	10
	6500K	2250	NA	284x115x55	ASTM01257	1700	10
45W	3000K	4050	NA	353x137x55	ASTM01453	2200	10
	6500K	4050	NA	353x137x55	ASTM01457	2200	10
<b>LED STREET LIGHT</b>							
15W	6500K	1350	NA	284x115x55	ASTM01157	1500	10
25W	6500K	2250	NA	284x115x55	ASTM01257	1700	10
45W	6500K	4050	NA	353x137x55	ASTM01457	2200	10
<b>LED FLOOD LIGHT</b>							
30W	6500K	1350	NA	284x115x55	AFLM01307	2200	10
50W	6500K	2250	NA	284x115x55	AFLM01507	2900	10
100W	6500K	4050	NA	353x137x55	AFLM01AB7	4000	10
<b>LED ROPE LIGHT - 45 METER</b>							
6W	3000K	72lm/W	NA	45000x10x4	PSLM12GH3	3000	1
	4000K	76lm/W	NA	45000x10x4	PSLM12GH4	3000	1
	6500K	80lm/W	NA	45000x10x4	PSLM12GH7	3000	1
	Red	NA	NA	45000x10x4	PSLM12GHR	3000	1
	Green	NA	NA	45000x10x4	PSLM12GHG	3000	1
	Blue	NA	NA	45000x10x4	PSLM12GHB	3000	1
	Amber	NA	NA	45000x10x4	PSLM12GHA	3000	1
	Pink	NA	NA	45000x10x4	PSLM12GHP	3000	1

**Panasonic Life Solutions India Pvt. Ltd.**

3rd Floor, B Wing, I-Think Techno Campus,  
Pokharan Road No. 2, Thane (W), Thane - 400 607, Maharashtra.  
Customer Care no. : 022-41304130  
Email: [wecare@in.panasonic.com](mailto:wecare@in.panasonic.com)  
[www.lsin.panasonic.com](http://www.lsin.panasonic.com)

**Panasonic**

All Rights Reserved © 2015 COPYRIGHT Panasonic Life Solutions India Pvt. Ltd.  
Specifications are subject to change without notice  
Printed in India

The duplication and transfer of images from this catalogue without permission is strictly prohibited.